
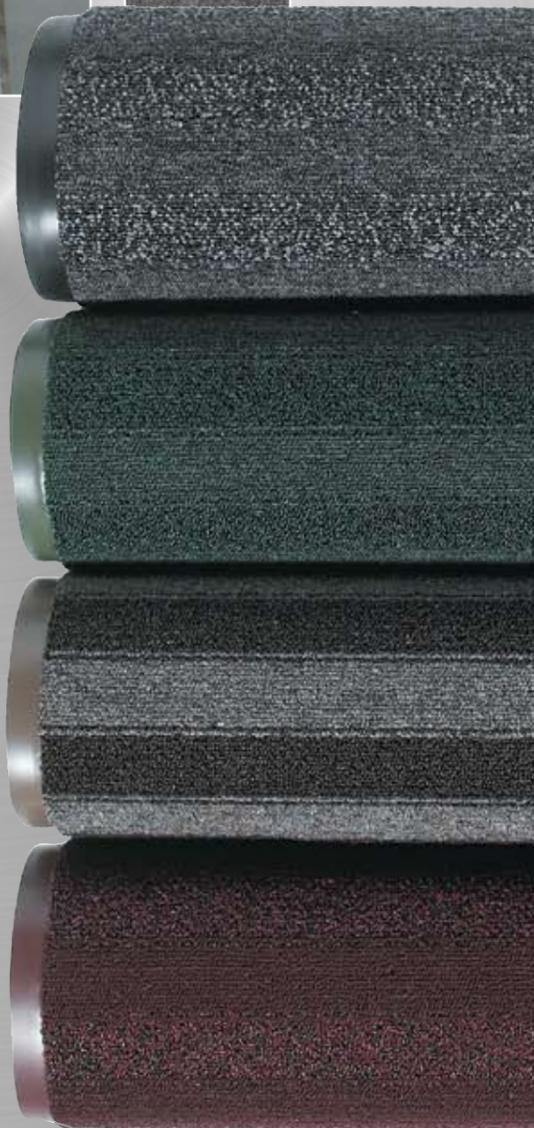


137 Opera™

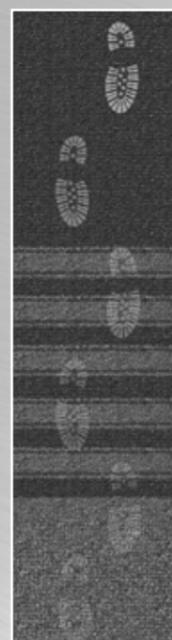

• A Notrax® exclusive: the first of its kind 3 mat system in one beautiful mat design. Based on the principle “the longer the mat, the better the result”, this mat is only available in three large sizes, each consisting of three zones:

Zone 1: aggressively scrapes heavy debris off shoe soles.

Zone 2: combines scraping and drying in a stripes pattern that follows the flow of traffic.

Zone 3: completes the drying process.

- Low profile allows foot and wheel traffic to traverse easily.
- A dense heavyweight vinyl backing ensures longevity and minimum movement.
- Colours of borders match carpet tops.
- Suitable for medium to heavy traffic conditions.
- For placement inside entrances in offices, hotels, banks, professional buildings schools, universities, restaurants, department stores.
- Vacuum clean
- Free of toxic DOP and DMF.

137 Opera™

PRODUCT SPECIFICATIONS		
Designation	Dust Control Matting	
Description	3-in-1 concept	
Type	Absorbent / scrape carpet mat	
Material		
	Top	Loop pile carpet of tough polypropylene grass yarns and soft Decalon® yarns, tightly tufted in attractive design consisting of 3 different zones. 800 grams of dual yarns per m ² .
	Backing	Vinyl
Process	Tufted	
Category	Indoor absorbent - Elegance	
Recommended use	Indoor - medium to heavy foot traffic areas	
Colours	Grey, Burgundy, Brown, Green	
Weight	4.1 kg/m ²	
Thickness	7 mm	
Standard sizes	90 cm x 305 cm (L) 120 cm x 366 cm (XL) 180 cm x 366 cm (XXL)	
Special remarks	Zone 1 : scrapes heavy debris Zone 2 : combines scraping and drying Zone 3 : completes the drying process	

PRODUCT TESTING		
Tests	Norms	Results
Abrasion resistance	ASTM D3884	Zone 1 : 1.00g weight loss Zone 2 : 1.27g weight loss Zone 3 : 1.45g weight loss
Colour fastness to light	AATCC 16E	
Accelerated wear test by sim floor machine	U.S.	Zone 1 : 26.9% Zone 2 : 13.91% Zone 3 : 22.46%
Accelerated soiling	U.S.	Zone 1 : 4 Zone 2 : 5 Zone 3 : 5
Anti-slip	DIN51130 BGR181	
Water retention	U.S	Zone 1 : 1.03 l/m ² Zone 2 : 2.7 l/m ² Zone 3 : 3.24 l/m ²
Sanitary epidemiologic test	GN 2.1.6.1338-03 MCL GN 2.1.6.2309-07 OBUV	Pass - Certificate no. 77.01.16.229.P.044984.07.09

FIRE TESTING			
	Surface Flammability	ASTM D2859	Pass
	Classification of the reaction to fire performance	DIN EN 13501-1	
Sustainability	<ul style="list-style-type: none"> • Recyclable material • REACH compliant (Registration, Evaluation, Authorization and restrictions of Chemicals) • Contributes to cleaner environment by Reducing need of cleaning chemicals 		